


Bottom Low Humidity Series 1%–5%RH(Automatic)


Newest Patent: Open door 30s and closed, the humidity can achieve <5%RH within 30 min!



Application

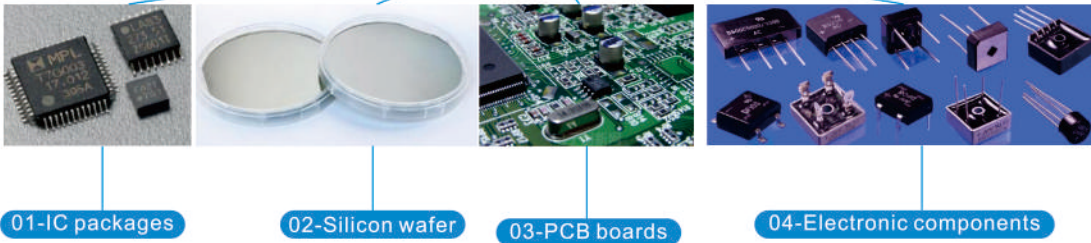

<Open door 30s and closed>

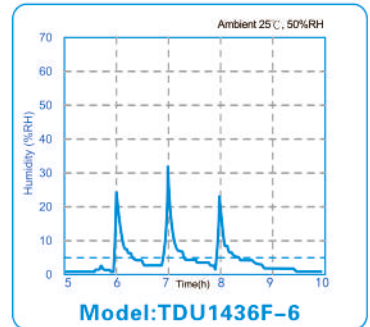

Workshop Details



Specification

Model ESD safe	Capacity	Internal Size (W×D×H,mm)	External Size (W×D×H,mm)	Shelves	GW (KG)	Average Power(W)	Max.Loading /Shelf(KG)
TDU320F	320L	898*422*848	900*450*1010	3	70	40	80
TDU435F	435L	898*572*848	900*600*1010	3	82	40	80
TDU540F	540L	596*682*1298	598*710*1465	3	95	60	80
TDU718F	718L	596*682*1723	598*710*1910	5	105	60	80
TDU870F	870L	898*572*1698	900*600*1890	5	130	80	100
TDU1436F-4	1436L	1198*682*1723	1200*710*1910	5	189	120	100
TDU1436F-6	1436L	1198*682*1723	1200*710*1910	5	189	120	100

Remark:

- 1.The whole cabinet is made by reinforced steel
- 2.White color is without ESD function.

- Options:**
- *Data logger with RS232 port
 - *Door open alarm
 - *Over humidity alarm