

Middle Humidity Series 20%–60%RH(Adjustable)

Application: camera, lenses, photographs, optical, negative, video tapes, slide, films, oil painting, stamps, drawing, microphones, CD, DVD, detector, charger, precision bearing, precious instruments, etc




TDA1436F-4

TDA1436F-6



<Open door 30s and closed>

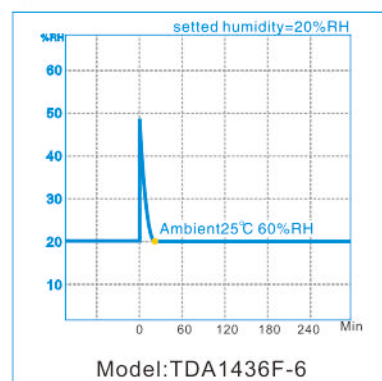

Temperature display accuracy $\pm 1^\circ \text{C}$

Humidity Controller



Humidity display accuracy $\pm 3\% \text{RH}$

Powerful desiccant (free exchange) inside cabinet absorb and exhaust moisture automatically, together with advanced IC timer, memory alloy and heating module, the whole cycle repeat automatically, so the inside humidity lowered, the humidity is controlled by LED controller.

Specification

Features:

- Equipped with powerful & fast dry unit
- Reinforced steel body with ESD paint (Black color)
- US imported Honeywell humidity sensor
- With 1M Ω earth terminal

Model ESD safe	Capacity	Internal Size (W×D×H, mm)	External Size (W×D×H, mm)	Shelves	GW (KG)	Average Power(W)	Max. Loading /Shelf(KG)
TDA98F	98L	446*372*598	448*400*688	1	31	13	50
TDA160F	160L	446*422*848	448*450*1010	3	43	18	50
TDA240F	240L	596*372*1148	598*400*1310	3	57	18	50
TDA320F	320L	898*422*848	900*450*1010	3	70	20	80
TDA435F	435L	898*572*848	900*600*1010	3	82	20	80
TDA540F	540L	596*682*1298	598*710*1465	3	95	20	80
TDA718F	718L	596*682*1723	598*710*1910	5	105	20	80
TDA870F	870L	898*572*1698	900*600*1890	5	130	40	100
TDA1436F-4	1436L	1198*682*1723	1200*710*1910	5	189	40	100
TDA1436F-6	1436L	1198*682*1723	1200*710*1910	5	189	40	100

Remark: The whole cabinet is made by reinforced steel. 2. White color is without ESD function.
Options: *Data logger with RS232 port *Door open alarm *Over humidity alarm